


MAXIMIZE EFFICIENCY WITH PROFESSIONAL FEATURES

With a FLIR Cx-Series camera in your pocket, you'll be ready anytime to find hot fuses, air leaks, plumbing issues, and more. Both C5 and C3-X camera models are packed with professional features that make it easier to inspect and find hidden problems, document issues, and share results with customers.

The FLIR C3-X is the entry-level camera in the series featuring 128 \times 96 (12,288 pixel) thermal resolution. The FLIR C5 offers an expanded feature set including a powerful 160 \times 120 (19,200 pixel) resolution thermal imager, video streaming, zoom capabilities, 1-Touch Level/Span, and a higher temperature range.



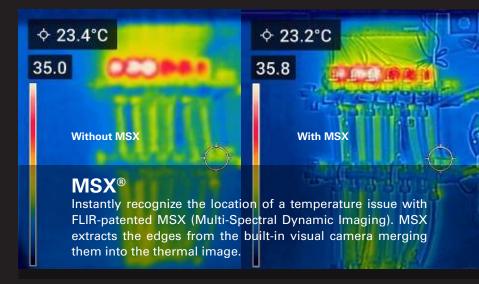



INSPECT EASILY



DOCUMENT PROBLEMS QUICKLY

Improve your team's efficiency and workflow with the FLIR Ignite cloud solution.

- Directly upload, organize, and back up images from anywhere over Wi-Fi
- Securely share images from the cloud via password-protected email link
- · Access images from any computer or mobile device



SHARE RESULTS INSTANTLY

Spend less time on analysis and reporting. Show clients or decision-makers existing faults or potential problems discovered during a thermal inspection to quickly get the "go-ahead" to begin on repairs.



Two convenient reporting software solutions:

FLIR Thermal Studio

Efficient Analysis and Reporting Software for PC

- Optimize images (color, level/span, MSX alignment), adjust measurement parameters, and perform simple image analysis
- Generate professional reports quickly—more than 100 pages in less than a minute—based on custom templates

FLIR Tools Mobile

Mobile App for iOS® and Android™ devices

- Quickly import, edit, and analyze images
- Produce simple reports on the go

SPECIFICATIONS

FLIR Cx-Series	C3-X	C5
IR sensor	128 × 96 (12,288 pixels)	160 × 120 (19,200 pixels)
Object temperature range	-20 to 300°C (-4 to 572°F)	-20 to 400°C (-4 to 752°F)
Zoom	No	Yes
Image adjustments	Automatic level and span, Manual level and span	Automatic level and span, Manual level and span, 1-Touch Level/Span
Streaming	No	USB Video Class colorized uncompressed with overlay
Notes (text)	Soft keyboard on touchscreen	Soft keyboard on touchscreen Auto-prompt for note when image is saved
Field of view (FOV)	54°×42°	
Thermal sensitivity/NETD	<70 mK	
Image frequency	8.7 Hz	
Focus	Focus free	
Spectral range	8 to 14 μm	
Screen size	3.5 in	
Visual camera	5 MP	
Display resolution	640×480	
Image modes	Infrared image, Visual image, MSX (Embossed visual details on thermal image), Picture-in-picture (IR area on visual image)	
FLIR Ignite TM cloud connectivity	Yes	
Data communication interface	Wi-Fi, Bluetooth® PAN, USB-C	
Battery operating time	4 hours	

For complete, up-to-date specifications and warranty information visit www.flir.com/C5 and www.flir.com/C3-X

FLIR's world-class Infrared Training Center (ITC) offers thermography certification courses around the world and online.

For more information visit:

www.flir.com NASDAQ: FLIR

CORPORATE HEADQUARTERS

FLIR Systems, Inc. 27700 SW Parkway Ave. Wilsonville, OR 97070 USA PH: +1 866.477.3687

LATIN AMERICA

FLIR Systems Brasil Av. Antonio Bardella, 320 Sorocaba, SP 18085-852 Brasil PH: +55 15 3238 8070

NASHUA

FLIR Systems, Inc. 9 Townsend West Nashua, NH 03063 USA PH: +1 866.477.3687

CANADA

FLIR Systems, Ltd. 3430 South Service Road, Suite 103 Burlington, ON L7N 3J5 Canada PH: +1 800.613.0507

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2020 FLIR Systems, Inc. All rights reserved. Rev.12/03/20

20-0997-INS-Cx-Series-Brochure-LTF

